


## 1. Performance Specifications


RFID Chip	NXP U Code 7		
Protocol	ISO/IEC 18000-6C, EPCglobal Class 1 Gen 2		
Operating Frequency	860~960MHz		
Operating Mode	Passive(Battery free)		
Memory	48bit TID, 128 bit EPC, 0 bit User Memory	32Bits Access, 32Bits Kill	
IC Life	100,000 Programming cycles, 10 years data retention		
Benefits	Average reading distance > 4m (Reader and Environment Dependent)		

## 2. Mechanical Dimensions

NO.	Item	Parameter(mm)	Tolerance	Parameter(in.)
1	Antenna Width	95.00 mm	± 0.20 mm	3.740 in.
2	Antenna Length	3.00 mm	± 0.20 mm	0.118 in.
37	Label Width	105.00 mm	± 0.20 mm	4.134 in.
38	Label Length	6.00 mm	± 0.50 mm	0.236 in.
42	Label Pitch	16.00 mm	± 1.00 mm	0.630 in.
43	Antenna Edge to Label Edge (Left)	1.50 mm	± 1.50 mm	0.059 in.
44	Antenna Edge to Label Edge (Right)	1.50 mm	± 1.50 mm	0.059 in.
45	Antenna Edge to Label Edge (Top)	5.00 mm	± 2.00 mm	0.197 in.
46	Antenna Edge to Label Edge (Bottom)	5.00 mm	± 2.00 mm	0.197 in.
47	Label Edge to Liner Edge (Top)	2.50 mm	± 1.50 mm	0.098 in.
48	Label Edge to Liner Edge (Bottom)	2.50 mm	± 1.50 mm	0.098 in.
53	Liner Width	110.00 mm	± 1.00 mm	4.331 in.
55	Ink-dot Size	4.00 mm	± 2.00 mm	0.157 in.
58	Ink-dot to Product Edge(Right)	3.00 mm	± 2.00 mm	0.118 in.
59	Ink-dot to Product Edge(Top)	52.50 mm	± 2.00 mm	2.067 in.
60	Core inner diameter	76.20 mm	± 1.00 mm	3.000 in.
61	Reel Outer diameter	(Based on the actual shipment quantity)		
62	Label Corner Radius	1.50 mm	± 0.20 mm	0.059 in.

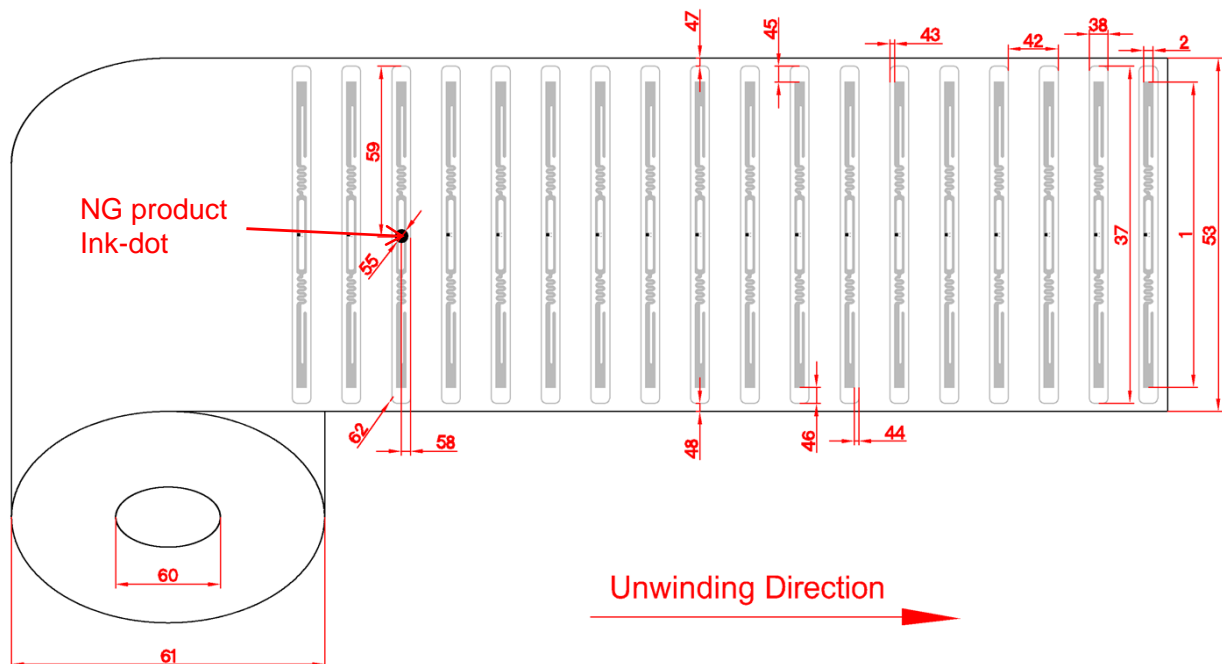

### 3. Label Structure

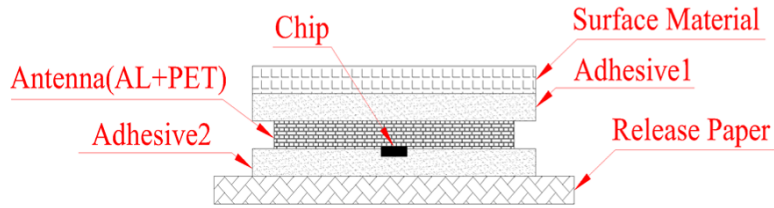

Surface Material	White glassine paper	61g/m <sup>2</sup> ± 10%, 55μm ± 10%
Adhesive 1	Acrylic emulsion	19g/m <sup>2</sup> ± 5g/m <sup>2</sup>
Antenna	Aluminum etching	AL + PET (10μm + 50μm)
Adhesive 2	Acrylic emulsion	19g/m <sup>2</sup> ± 5g/m <sup>2</sup>
Release Paper	White glassine paper	61g/m <sup>2</sup> ± 10%, 55μm ± 10%

### 4. Environment Requirement

Operating Temperature/Humidity	-0~60℃ / 20%~80% RH	
Storage Temperature/Humidity	20~30℃ / 20%~60% RH	
Shelf Life	1 year in anti-static bag at 20~30℃ / 20% ~60% RH	
ESD Voltage Immunity	2 kV (HBM)	
Bending Diameter	> 50mm	

### 5. Delivery Details

Appearance	Single row reel form	
Quantity	5000 ± 100pcs/Roll; 4 Rolls/Carton	Based on the actual shipment quantity
Weight	To be determined	
Final inspection	100 %, known faulty ones marked	
Delivery yield	≥ 99%	

Packaging Photograph



**AllGood-Group reserves the right for modifying the specification data without notice in advance!**